

Extreme Power DomiLED

With its significant power in terms brightness, viewing angle and variety of application possibilities, Extreme Power DomiLED truly is a standout performer! Ideal for automotive interior lighting as well as home, office and industrial applications, it is also a proven performer in electronic signs and signals.



Features:

- > High brightness surface mount LED using thin film technology.
- > 115° viewing angle.
- > Low thermal resistance.
- > Qualified according to JEDEC moisture sensitivity Level 2.
- > Compatible to IR reflow soldering.
- > Environmental friendly; RoHS compliance.
- > Compliance to automotive standard; AEC-Q102.
- > Superior Corrosion Resistance.



Applications:

- > Automotive: interior applications, eg: switches, telematics, climate control system, dashboard, etc.
- > Automotive: exterior applications, eg: signal lighting, Center High Mounted Stop Light (CHMSL), Rear Combination Light (RCL).



Optical Characteristics at Tj=25°C

Part Number	Color	Viewing Angle°	Luminous Flux @ If = 140mA(lm) <i>Appx. 1.2</i>		
			Min.	Typ.	Max.
● D6S-SKG-K3N2-1	Super Red, 632nm	115	9.35	13.9	20.6
● D6A-SKG-NP3-4	Amber, 624nm	115	18.1	23.5	30.6
● D6A-SKG-N3Q2-2	Amber, 615nm	115	20.6	26.8	34.8
● D6A-SKG-M3Q2-1	Amber, 617nm	115	15.8	23.5	34.8
● D6Y-SKG-NP3-1	Yellow, 589nm	115	18.1	23.5	30.6
● D6Y-SKG-L3P2-1	Yellow, 589nm	115	12.2	18.1	26.8
● D6G-SKG-L3N2-1	Green, 583nm	115	12.2	15.8	20.6
● Not for new design					

Electrical Characteristics at Tj=25°C

Part Number	Vf @ If = 140mA <i>Appx. 3.1</i>			Vr @ Ir = 10uA <i>Appx. 6.1</i>
	Min. (V)	Typ. (V)	Max. (V)	Min. (V)
D6x-SKG (except Green)	1.90	2.30	2.50	12
D6G-SKG	1.90	2.40	2.65	12

Absolute Maximum Ratings

	Maximum Value	Unit
DC forward current	200	mA
Peak pulse current; (Ts=55 °C, tp ≤ 100µs, Duty cycle = 0.03)	300	mA
Reverse voltage <i>Appx. 6.1</i>	12	V
ESD threshold (HBM)	2	kV
LED junction temperature	125	°C
Operating temperature	-40 ... +115	°C
Storage temperature	-40 ... +125	°C
Thermal resistance (Rated current = 140mA, Ts = 25 °C)		
- Real Thermal Resistance		
Junction / solder point, R _{th JS real}		
Super Red & Amber (typ = 35)	45	K/W
Yellow & Green (typ = 38)	45	K/W
- Electrical Thermal Resistance		
Junction / solder point, R _{th JS el}		
Super Red & Amber (typ = 23)	30	K/W
Yellow & Green (typ = 33)	38	K/W

Wavelength Grouping at Tj= 25°C

Color	Group	Wavelength distribution (nm) <i>Appx. 2.2</i>
D6S, Super Red	Full	627 - 639
D6A; Amber	Full	612 - 627
	W	612 - 616
	X	616 - 620
	Y	620 - 624
	Z	624 - 627
D6Y; Yellow	Full	586 - 595
	X	586 - 589
	Y	589 - 592
	Z	592 - 595
D6G; Green	Full	580 - 586
	X	580 - 583
	Y	583 - 586

Luminous Flux Group

Brightness Group	Luminous Flux Appx. 1.2 (lm)
K3	9.35 ... 10.7
L2	10.7 ... 12.2
L3	12.2 ... 13.9
M2	13.9 ... 15.8
M3	15.8 ... 18.1
N2	18.1 ... 20.6
N3	20.6 ... 23.5
P2	23.5 ... 26.8
P3	26.8 ... 30.6
Q2	30.6 ... 34.8


Vf Bining (Optional)

Vf @ If = 140mA	Forward Voltage (V) Appx. 3.1
V1	1.90 ... 2.05
V2	2.05 ... 2.20
V3	2.20 ... 2.35
V4	2.35 ... 2.50
V5	2.50 ... 2.65

Please consult sales and marketing for special part number to incorporate Vf binning.


Relative Luminous Flux Vs Forward Current Appx. 4.1

$$\Phi_V / \Phi_V(140\text{mA}) = f(I_F); T_j = 25^\circ\text{C}$$

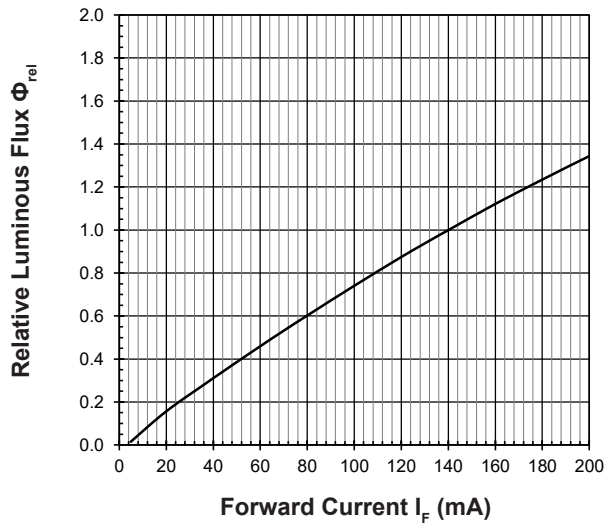


Forward Current Vs Forward Voltage Appx. 4.1

$$I_F = f(V_F); T_j = 25^\circ\text{C}$$

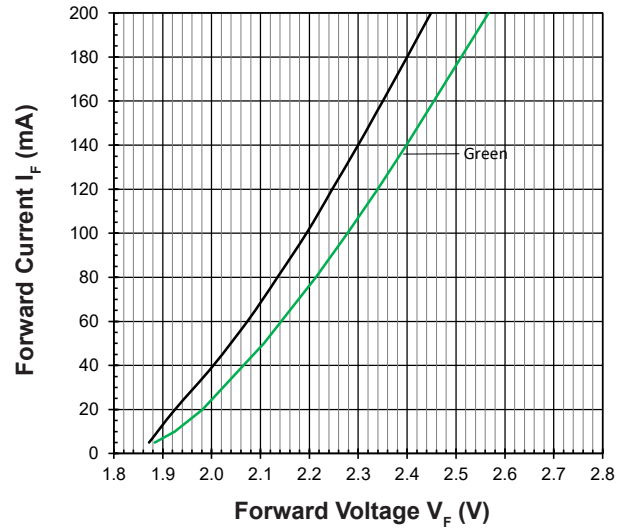


Maximum Current Vs Temperature

$$I_F = f(T)$$

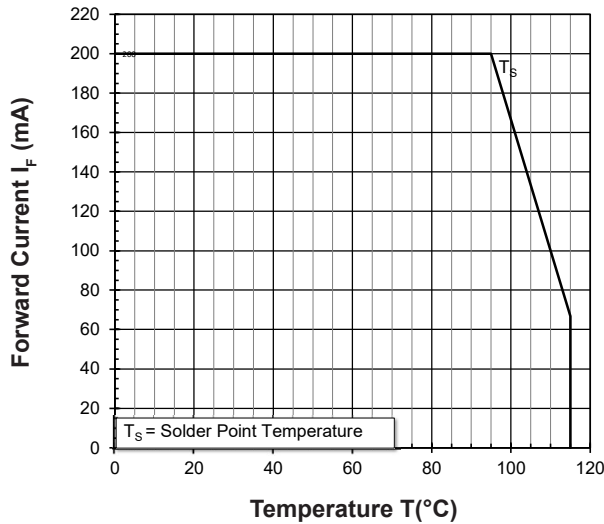

Relative Spectral Emission Appx. 4.1

$$\Phi_{rel} = f(\lambda); T_j = 25^\circ\text{C}; I_F = 140\text{mA}$$

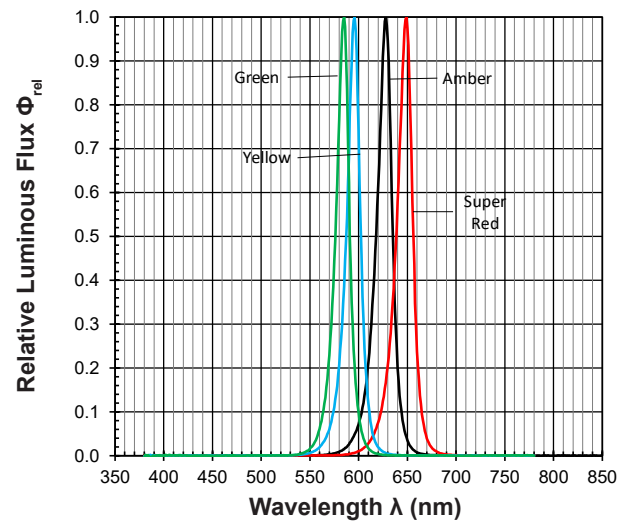


Allowable Forward Current Vs Duty Ratio

$$(T_s = 55^\circ\text{C}; t_p \leq 100\mu\text{s})$$




Radiation Pattern Appx. 4.1

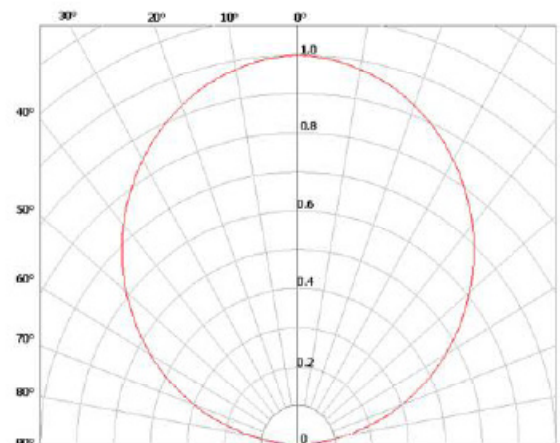


Forward Voltage Vs Junction Temperature Appx. 4.1

$$\Delta V_F = V_F - V_F(25^\circ\text{C}) = f(T_j); I_F = 140\text{mA}$$

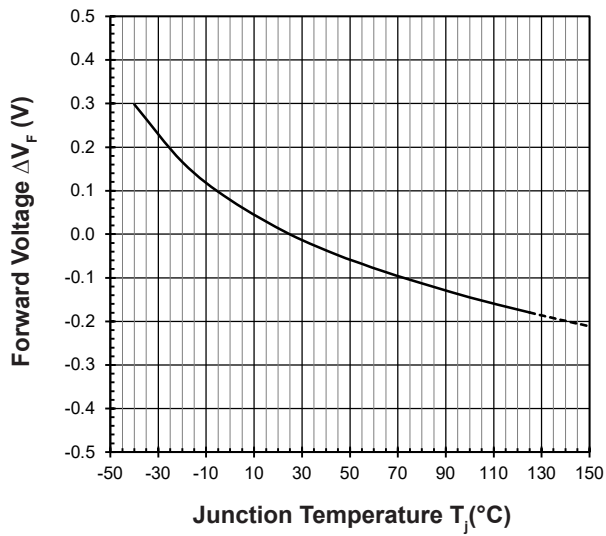


Relative Luminous Flux Vs Junction Temperature Appx. 4.1

$$\Phi_V/\Phi_V(25^\circ\text{C}) = f(T_j); I_F = 140\text{mA}$$

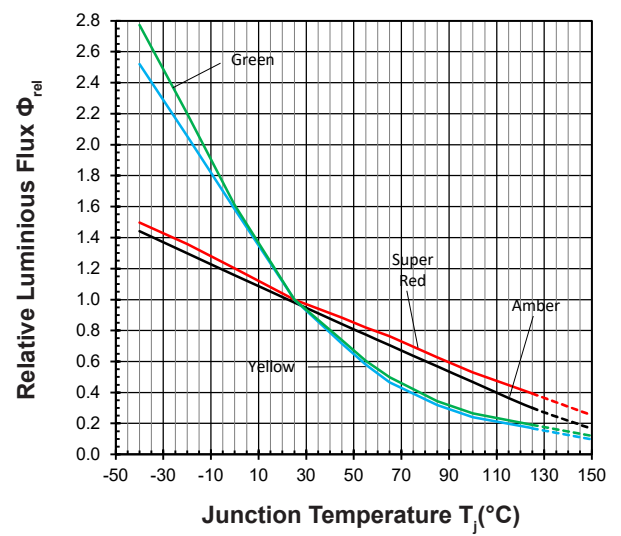


Wavelength Vs Junction Temperature Appx. 4.1

$$\Delta\lambda_{\text{dom}} = \lambda_{\text{dom}} - \lambda_{\text{dom}}(25^\circ\text{C}) = f(T_j); I_F = 140\text{mA}$$

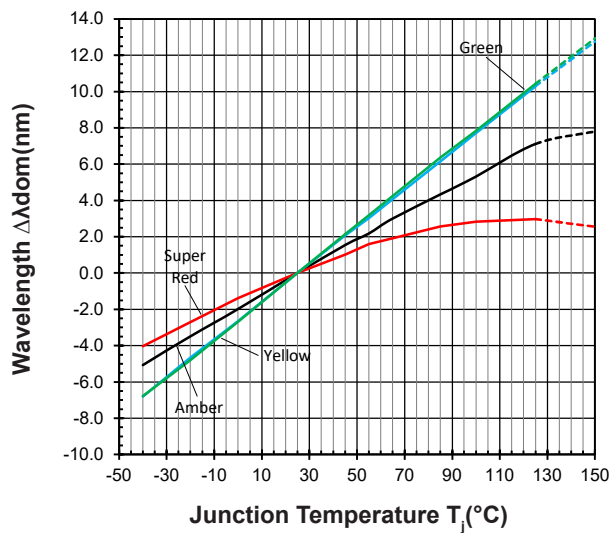


Extreme Power DomiLED • AllnGaP : D6x-SKG Package Outlines *Appx. 5.1*

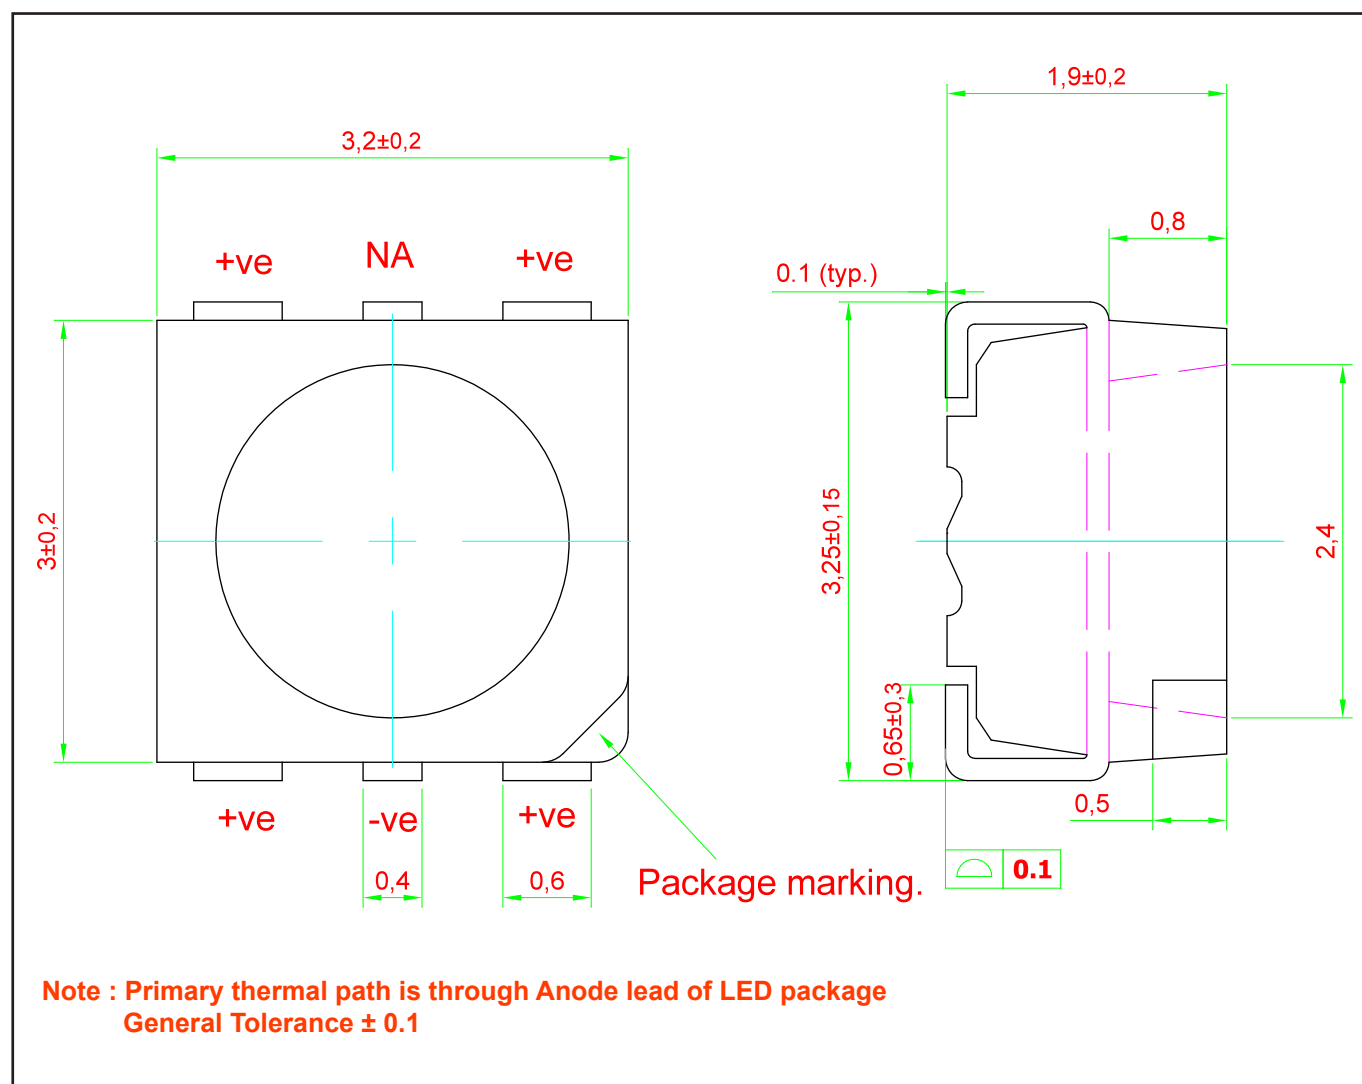

Material

Material	
Lead-frame	Cu Alloy With Au Plating
Package	High Temperature Resistant Plastic
Encapsulant	Silicone Resin
Soldering Leads	Au Plating

Recommended Solder Pad *Appx. 5.1*

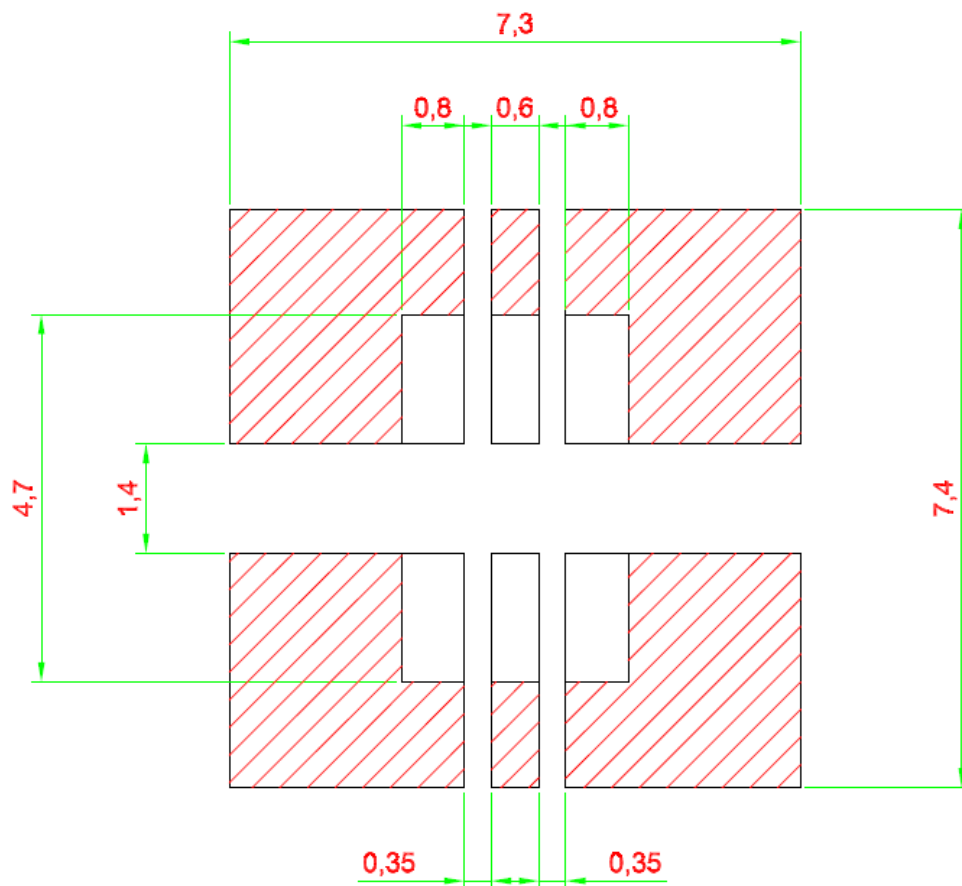


Exposed Cu for soldering





Cu area with solder mask for heat dissipation.

Taping and orientation Appx. 5.1

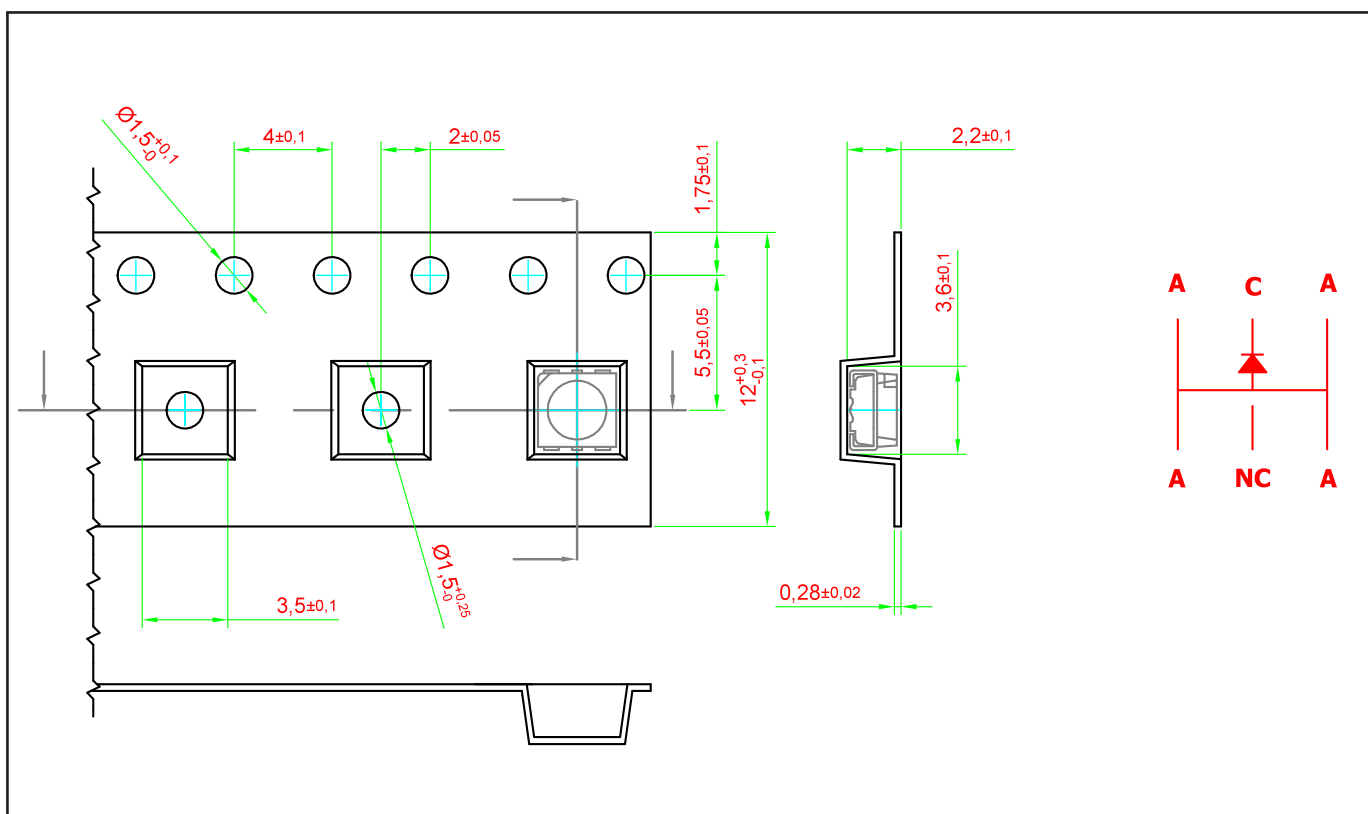

Packaging Specification

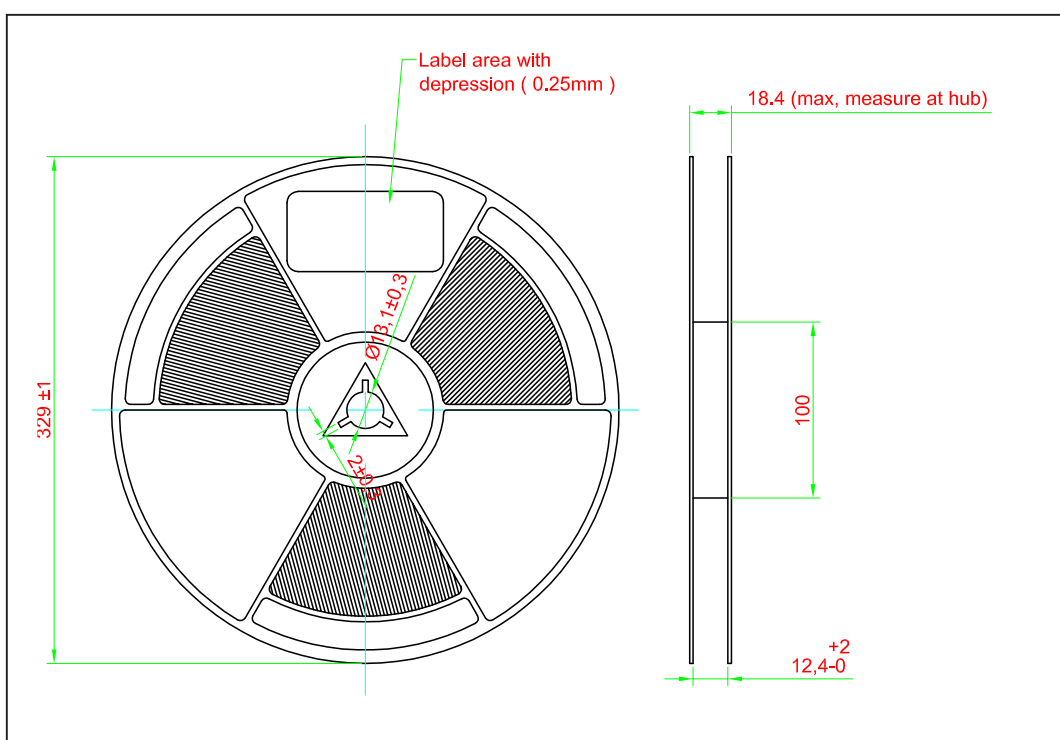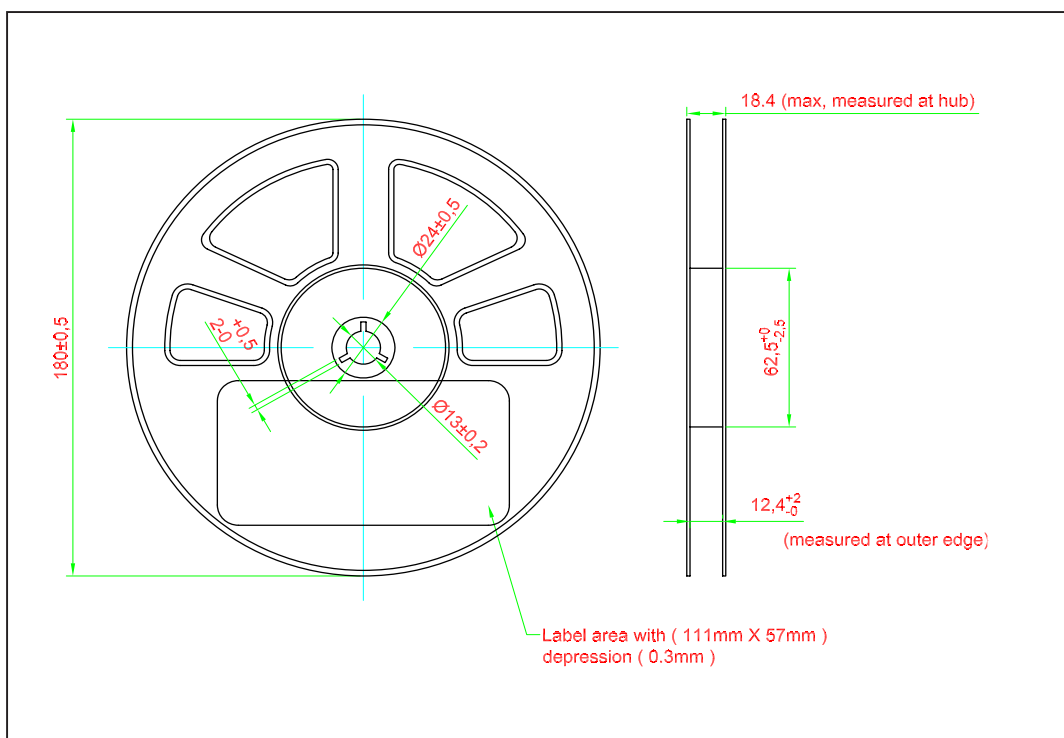


	Reel Diameter (mm)	Quantity (pcs)	*Ordering Number
Standard Packing	180	1000	D6x-SKG-xxx-x
Optional Packing	329	4000	D6x-SKG-xxx-x-4

Notes:

* For ordering purpose only. Please consult sales and marketing for details.


Packaging Specification

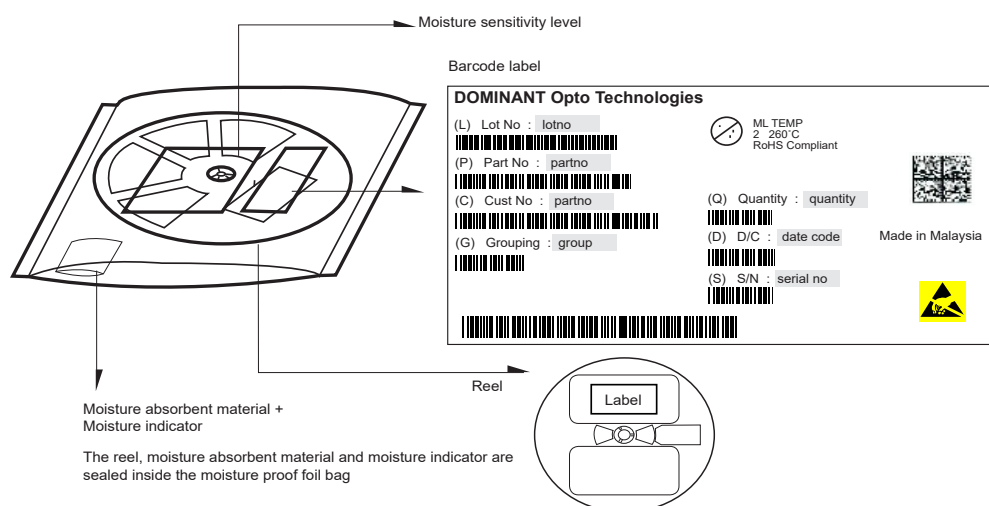

Quantity per bag (pcs)	Average 1pc Extreme Power DomiLED (g)	1 completed bag (g)
1000	0.036	240 ± 10
4000	0.036	750 ± 10

Recommended Pb-free Soldering Profile

Product complies to MSL Level 2 acc. to JEDEC J-STD-020E

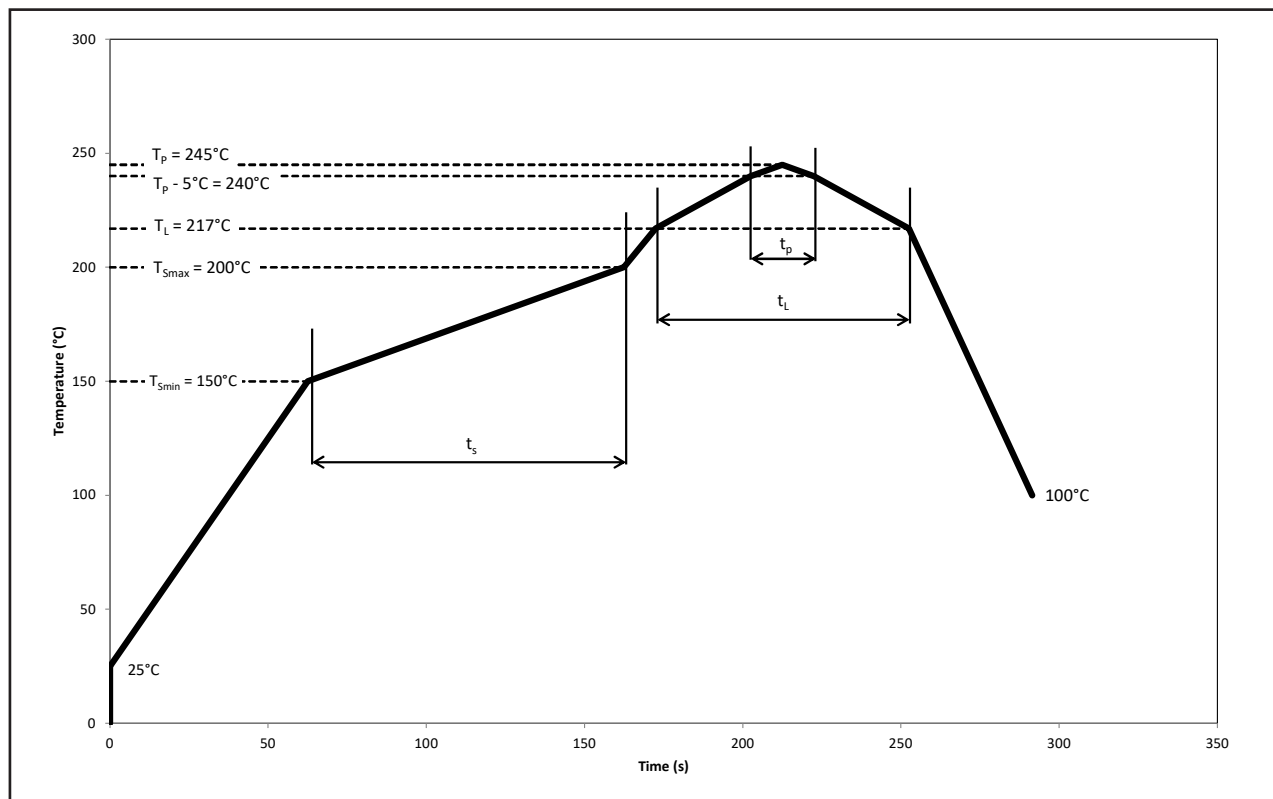

Profile Feature	Symbol	Min.	Pb-Free Assembly		Unit
			Recommended	Max.	
Ramp-up rate to preheat 25°C to T _{smin}	-	-	2	3	°C/s
Time t _s T _{smin} to T _{smax}	t _s	60	100	120	s
Ramp-up rate to peak T _L to T _p	-	-	2	3	°C/s
Liquidous temperature	T _L	-	217	-	°C
Time above liquidous temperature	t _L	60	80	150	s
Peak temperature	T _p	-	245	260	°C
Time within 5°C of the specified peak temperature T _p - 5°C	t _p	10	20	30	s
Ramp-down rate T _p to 100°C	-	-	3	6	°C/s
Time 25°C to T _p	-	-	-	480	s

Appendix

1) **Brightness:**

- 1.1 Luminous intensity is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 8 \%$ and an expanded uncertainty of $\pm 11 \%$ (according to GUM with a coverage factor of $k=3$).
- 1.2 Luminous flux is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 8 \%$ and an expanded uncertainty of $\pm 11 \%$ (according to GUM with a coverage factor of $k=3$).
- 1.3 Radiant intensity is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 8 \%$ and an expanded uncertainty of $\pm 11 \%$ (according to GUM with a coverage factor of $k=3$).
- 1.4 Radiant flux is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 8 \%$ and an expanded uncertainty of $\pm 11 \%$ (according to GUM with a coverage factor of $k=3$).

2) **Color:**

- 2.1 Chromaticity coordinate groups are measured at current pulse 25 ms(typ) with an internal reproducibility of ± 0.005 and an expanded uncertainty of ± 0.01 (accordingly to GUM with a coverage factor of $k=3$).
- 2.2 Dominant wavelength is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 0.5\text{nm}$ and an expanded uncertainty of $\pm 1\text{nm}$ (accordingly to GUM with a coverage factor of $k=3$).

3) **Voltage:**

- 3.1 Forward Voltage, V_f is measured when a current pulse of 8 ms(typ) with an internal reproducibility of $\pm 0.05\text{V}$ and an expanded uncertainty of $\pm 0.1\text{V}$ (accordingly to GUM with a coverage factor of $k=3$).

4) **Typical Values:**

- 4.1 Due to the specific conditions of semiconductor devices' manufacturing processes, the provided typical data and calculated correlations of technical parameters should only be considered as statistical values. It is important to note that the actual parameters of individual devices may deviate from these typical data, calculated correlations or the typical characteristic line. Dominant reserves the right to update this typical data without prior notice, particularly in response to technical enhancements

5) **Tolerance of Measure**

- 5.1 Unless otherwise noted in drawing, tolerances are specified with ± 0.1 and dimension are specified in mm.

6) **Reverse Voltage:**

- 6.1 Not designed for reverse operation. Continuous reverse voltage can cause migration and LED damage.

Revision History

Page	Subjects	Date of Modification
2, 10, 11	Not for New Design: D6Y-SKG-L3P2-1 Add New Partno: D6Y-SKG-NP3-1 Typo Error: D6A-SKG-N2P-4 to D6A-SKG-NP3-4 Typo Error on Reels Update Package Specification	28 Jun 2018
2	Add New Partno: D6G-SKG-L3N2-1	11 Jan 2019
7, 9	Typo Error on Package Outline & Taping and Orientation	21 Oct 2019
1, 2, 5, 6	Update Features Update Peak Pulse Current Update Graph	05 Feb 2020
10, 11, 12, 13	Add in Bigger Reel Size Option Update Recommended Pb-free Soldering Profile	18 Mar 2021
7, 9	Update Package Outline Update Taping and Orientation	15 Oct 2021
3, 5, 6	Update Thermal resistance Update Graph	13 Oct 2022
2, 11	Not for New Design: D6G-SKG-L3N2-1 Update Packaging Specification	11 Nov 2025
2	Not for New Design: D6S-SKG-K3N2-1, D6A-SKG-NP3-4, D6A-SKG-N3Q2-2, D6Y-SKG-NP3-1	13 Aug 2026

NOTE

All the information contained in this document is considered to be reliable at the time of publishing. However, DOMINANT Opto Technologies does not assume any liability arising out of the application or use of any product described herein.

DOMINANT Opto Technologies reserves the right to make changes to any products in order to improve reliability, function or design.

DOMINANT Opto Technologies products are not authorized for use as critical components in life support devices or systems without the express written approval from the Managing Director of DOMINANT Opto Technologies.

Dispose of product is in accordance with local, regional, national and international regulations.

About Us

DOMINANT Opto Technologies is a dynamic company that is amongst the world's leading automotive LED manufacturers. With an extensive industry experience and relentless pursuit of innovation, DOMINANT's state-of-art manufacturing and development capabilities have become a trusted and reliable brand across the globe. More information about DOMINANT Opto Technologies, an IATF 16949 and ISO 14001 certified company, can be found under <http://www.dominant-semi.com>.

Please contact us for more information:

DOMINANT Opto Technologies Sdn. Bhd
Lot 6, Batu Berendam, FTZ Phase III, 75350 Melaka, Malaysia.
Tel: +606 283 3566 Fax: +606 283 0566
E-mail: sales@dominant-semi.com