

Mini DomiLED

With the intense colors that seem to glow with energy and its significant brightness, Mini DomiLED white LED is a highly reliable design device. Its dynamic nature makes it perfect choice for lighthing applications, office and home applications and standard industrial applications.



Features:

- > High brightness surface mount LED.
- > Based on InGaN technology.
- > 120° viewing angle.
- > Small package outline (LxWxH) of 2.0 x 1.4 x 1.3mm.
- > Qualified according to JEDEC moisture sensitivity Level 2.
- > Compatible to both IR reflow soldering.
- > Environmental friendly; RoHS compliance.
- > Compliance to automotive standard; AEC-Q102.
- > Superior Corrosion Resistant.



Applications:

- > Automotive: interior applications, eg: switches, telematics, climate control system, dashboard, etc.
- > Communication: indicator and backlight in mobilephone.
- > Display: full color display video notice board.
- > Industry: white goods (eg: Oven, microwave, etc.).



Optical Characteristics at Tj=25°C

| Part Number | Color | Viewing Angle° | Luminous Intensity @ 5mA (mcd) <i>Appx. 1.1</i> | | |
|--------------------|-------|----------------|---|------|------|
| | | | Min. | Typ. | Max. |
| DNW-EKG-N2-F1H3-I5 | White | 120 | 35.5 | 40.5 | 45.0 |
| DNW-EKG-P1-I1L3-I5 | White | 120 | 45.0 | 50.5 | 56.0 |
| DNW-EKG-P1-M1P3-I5 | White | 120 | 45.0 | 50.5 | 56.0 |


Electrical Characteristics at Tj=25°C

| Part Number | Vf @ If = 5 mA <i>Appx. 3.1</i> | | | Vr @ Ir = 10 µA <i>Appx. 6.1</i> |
|-------------|---------------------------------|----------|----------|----------------------------------|
| | Min. (V) | Typ. (V) | Max. (V) | Min. (V) |
| DNW-EKG | 2.6 | 2.9 | 3.2 | 5.0 |

Absolute Maximum Ratings

| | Maximum Value | Unit |
|---|---------------|------|
| DC forward current | 20 | mA |
| Peak pulse current; (T _s =55°C, tp ≤ 100µs, Duty cycle = 0.03) | 100 | mA |
| Reverse voltage <i>Appx. 6.1</i> | 5 | V |
| ESD threshold (HBM) | 2000 | V |
| LED junction temperature | 110 | °C |
| Operating temperature | -40 ... +105 | °C |
| Storage temperature | -40 ... +110 | °C |
| Power dissipation (at room temperature) | 70 | mW |
| Real Thermal resistance - Junction / solder point, R _{th JS real} | 230 | K/W |

DNW, Color Grouping *Appx. 2.1*

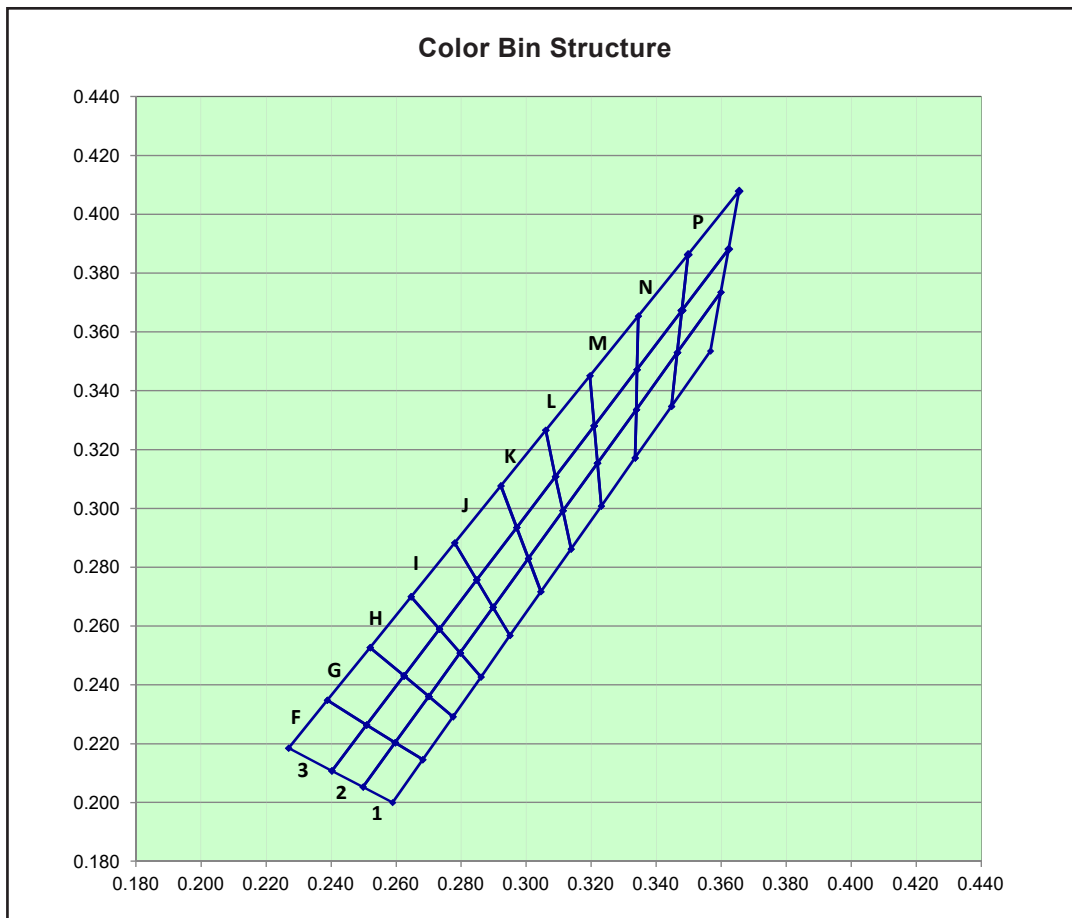

| Bin | | 1 | 2 | 3 | 4 |
|-----|----|--------|--------|--------|--------|
| F1 | Cx | 0.2498 | 0.2589 | 0.2682 | 0.2597 |
| | Cy | 0.2053 | 0.2000 | 0.2146 | 0.2204 |
| F2 | Cx | 0.2402 | 0.2498 | 0.2597 | 0.2509 |
| | Cy | 0.2108 | 0.2053 | 0.2204 | 0.2264 |
| F3 | Cx | 0.2269 | 0.2388 | 0.2509 | 0.2402 |
| | Cy | 0.2185 | 0.2348 | 0.2264 | 0.2108 |
| G1 | Cx | 0.2597 | 0.2682 | 0.2775 | 0.2700 |
| | Cy | 0.2204 | 0.2146 | 0.2292 | 0.2361 |
| G2 | Cx | 0.2509 | 0.2597 | 0.2700 | 0.2624 |
| | Cy | 0.2264 | 0.2204 | 0.2361 | 0.2431 |
| G3 | Cx | 0.2388 | 0.2509 | 0.2624 | 0.2520 |
| | Cy | 0.2348 | 0.2264 | 0.2431 | 0.2527 |
| H1 | Cx | 0.2700 | 0.2775 | 0.2861 | 0.2797 |
| | Cy | 0.2361 | 0.2292 | 0.2427 | 0.2509 |
| H2 | Cx | 0.2624 | 0.2700 | 0.2797 | 0.2733 |
| | Cy | 0.2431 | 0.2361 | 0.2509 | 0.2590 |
| H3 | Cx | 0.2520 | 0.2624 | 0.2733 | 0.2646 |
| | Cy | 0.2527 | 0.2431 | 0.2590 | 0.2700 |
| I1 | Cx | 0.2797 | 0.2861 | 0.2950 | 0.2898 |
| | Cy | 0.2509 | 0.2427 | 0.2568 | 0.2664 |

| Bin | | 1 | 2 | 3 | 4 |
|-----|----|--------|--------|--------|--------|
| I2 | Cx | 0.2733 | 0.2797 | 0.2898 | 0.2848 |
| | Cy | 0.2590 | 0.2509 | 0.2664 | 0.2757 |
| I3 | Cx | 0.2646 | 0.2733 | 0.2848 | 0.2780 |
| | Cy | 0.2700 | 0.2590 | 0.2757 | 0.2883 |
| J1 | Cx | 0.2898 | 0.2950 | 0.3045 | 0.3007 |
| | Cy | 0.2664 | 0.2568 | 0.2717 | 0.2830 |
| J2 | Cx | 0.2848 | 0.2898 | 0.3007 | 0.2971 |
| | Cy | 0.2757 | 0.2664 | 0.2830 | 0.2935 |
| J3 | Cx | 0.2780 | 0.2848 | 0.2971 | 0.2922 |
| | Cy | 0.2883 | 0.2757 | 0.2935 | 0.3077 |
| K1 | Cx | 0.3007 | 0.3045 | 0.3138 | 0.3113 |
| | Cy | 0.2830 | 0.2717 | 0.2862 | 0.2992 |
| K2 | Cx | 0.2971 | 0.3007 | 0.3113 | 0.3090 |
| | Cy | 0.2935 | 0.2830 | 0.2992 | 0.3108 |
| K3 | Cx | 0.2922 | 0.2971 | 0.3090 | 0.3060 |
| | Cy | 0.3077 | 0.2935 | 0.3108 | 0.3266 |
| L1 | Cx | 0.3113 | 0.3138 | 0.3231 | 0.3219 |
| | Cy | 0.2992 | 0.2862 | 0.3008 | 0.3154 |
| L2 | Cx | 0.3090 | 0.3113 | 0.3219 | 0.3209 |
| | Cy | 0.3108 | 0.2992 | 0.3154 | 0.3281 |
| L3 | Cx | 0.3060 | 0.3090 | 0.3209 | 0.3196 |
| | Cy | 0.3266 | 0.3108 | 0.3281 | 0.3451 |
| M1 | Cx | 0.3219 | 0.3231 | 0.3335 | 0.3339 |
| | Cy | 0.3154 | 0.3008 | 0.3172 | 0.3336 |
| M2 | Cx | 0.3209 | 0.3219 | 0.3339 | 0.3341 |
| | Cy | 0.3281 | 0.3154 | 0.3336 | 0.3472 |
| M3 | Cx | 0.3196 | 0.3209 | 0.3341 | 0.3345 |
| | Cy | 0.3451 | 0.3281 | 0.3472 | 0.3654 |
| N1 | Cx | 0.3335 | 0.3339 | 0.3465 | 0.3447 |
| | Cy | 0.3172 | 0.3336 | 0.3530 | 0.3347 |
| N2 | Cx | 0.3339 | 0.3341 | 0.3479 | 0.3465 |
| | Cy | 0.3336 | 0.3472 | 0.3673 | 0.3530 |
| N3 | Cx | 0.3341 | 0.3345 | 0.3498 | 0.3479 |
| | Cy | 0.3472 | 0.3654 | 0.3863 | 0.3673 |
| P1 | Cx | 0.3447 | 0.3465 | 0.3599 | 0.3567 |
| | Cy | 0.3347 | 0.3530 | 0.3735 | 0.3535 |
| P2 | Cx | 0.3465 | 0.3479 | 0.3623 | 0.3599 |
| | Cy | 0.3530 | 0.3673 | 0.3882 | 0.3735 |
| P3 | Cx | 0.3479 | 0.3498 | 0.3655 | 0.3623 |
| | Cy | 0.3673 | 0.3863 | 0.4079 | 0.3882 |


InGaN wavelength is very sensitive to drive current. Operating at lower current is not recommended and may yield unpredictable performance. Current pulsing should be used for dimming purposes.

Luminous Intensity Group at Tj=25°C

| Brightness Group | Luminous Intensity <small>Appx. 1.1</small> IV (mcd) |
|------------------|---|
| N2 | 35.5 ... 45.0 |
| P1 | 45.0 ... 56.0 |


Relative Luminous Intensity Vs Forward Current

$I_v/I_v(5mA) = f(I_F); T_j = 25^\circ C$

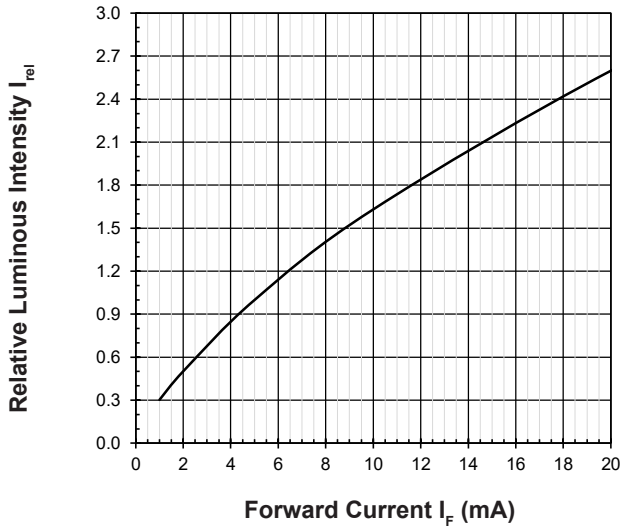


Forward Current Vs Forward Voltage

$I_F = f(V_F); T_j = 25^\circ C$

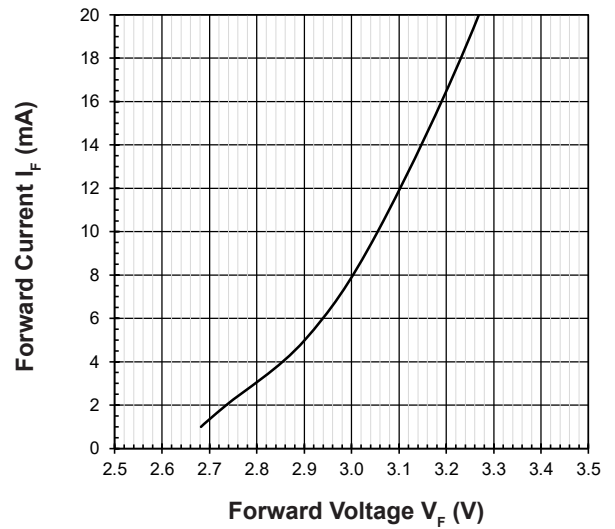


Maximum Current Vs Temperature

$I_F = f(T)$

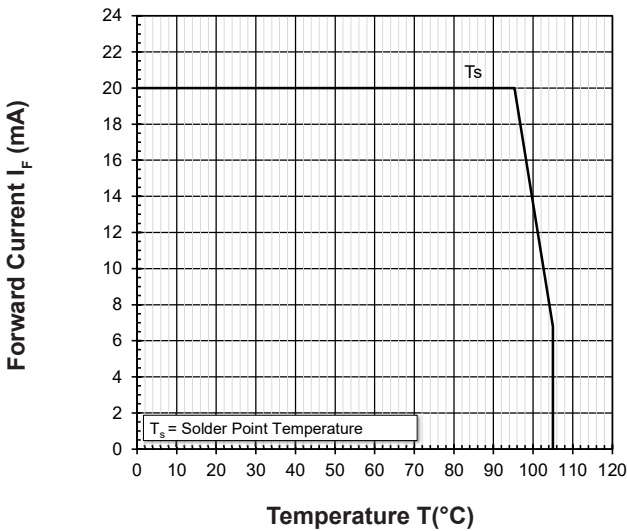


Relative Spectral Emission

$I_{rel} = f(\lambda); T_j = 25^\circ C; I_F = 5mA$

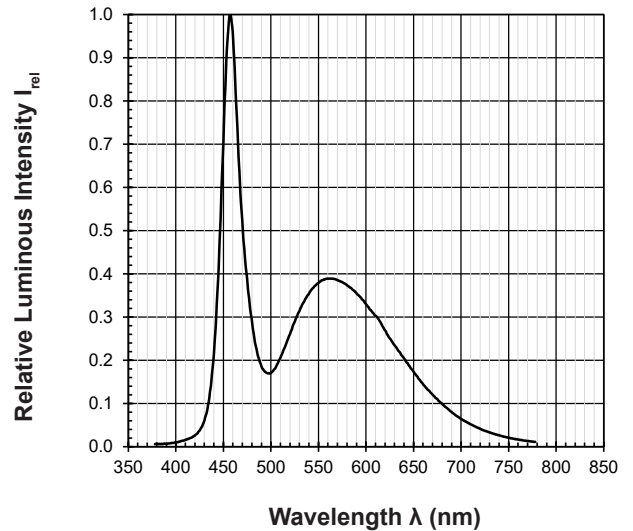


Chromaticity Coordinate Shift Vs Forward Current

$\Delta Cx, \Delta Cy = f(I_F); T_j = 25^\circ C$

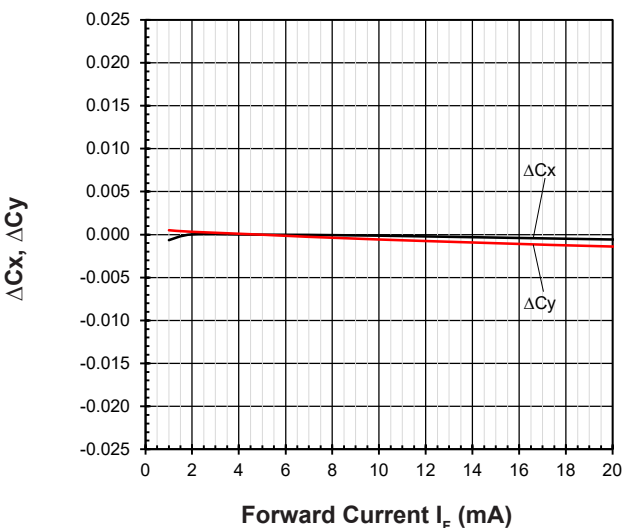


Allowable Forward Current Vs Duty Ratio

$(T_s = 55^\circ C; t_p \le 100\mu s)$

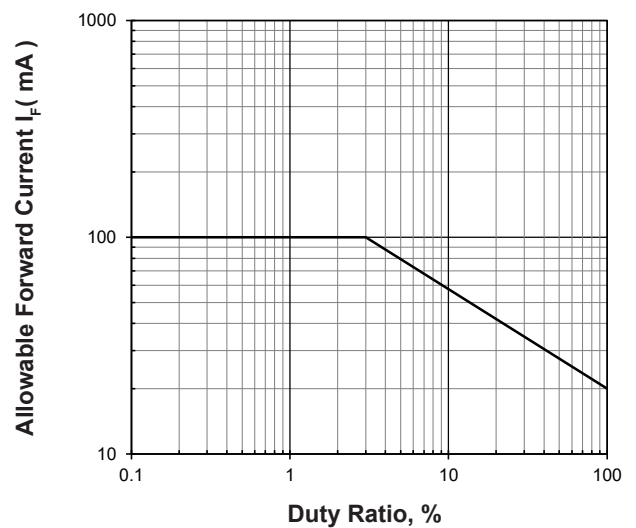


Radiation Pattern

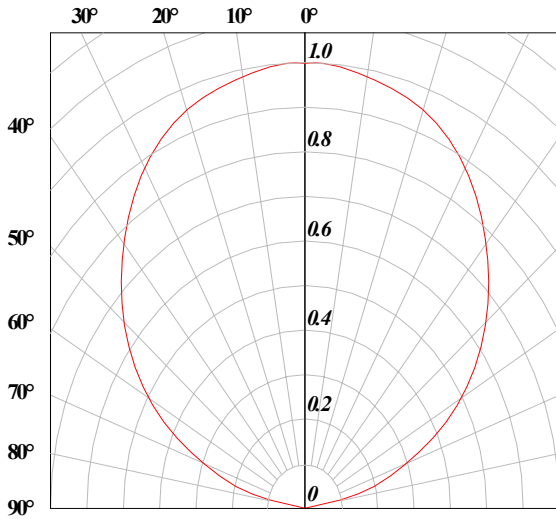


Forward Voltage Vs Junction Temperature

$\Delta V_F = V_F - V_F(25^\circ\text{C}) = f(T_j); I_F = 5\text{mA}$

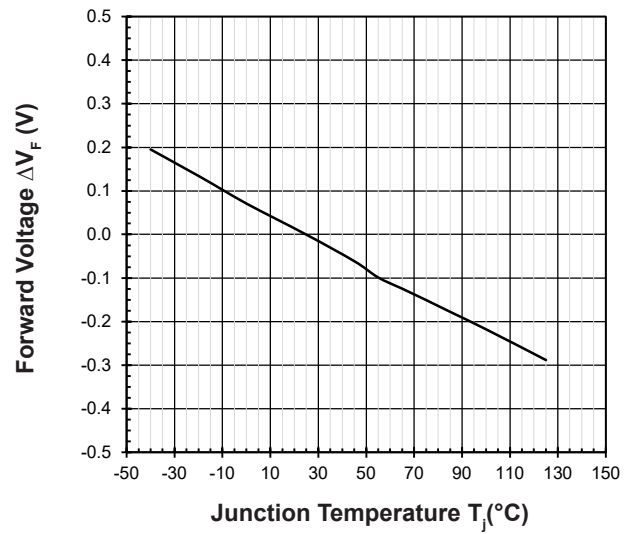


Relative Luminous Intensity Vs Junction Temperature

$I_v/I_v(25^\circ\text{C}) = f(T_j); I_F = 5\text{mA}$

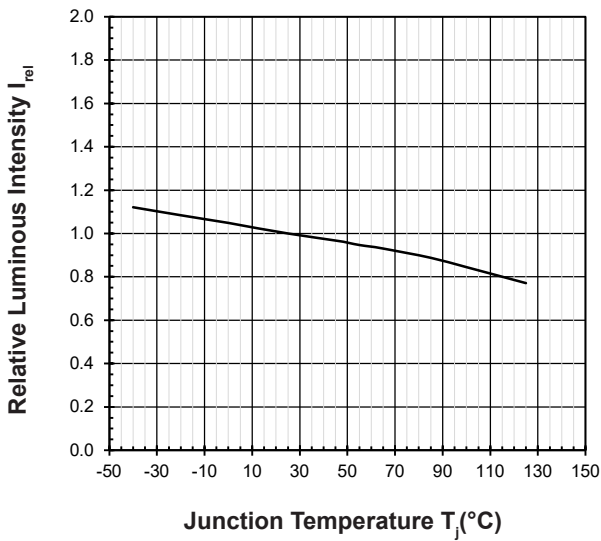


Chromaticity Coordinate Shift Vs Junction Temperature

$\Delta Cx, \Delta Cy = f(T_j); I_F = 5\text{mA}$

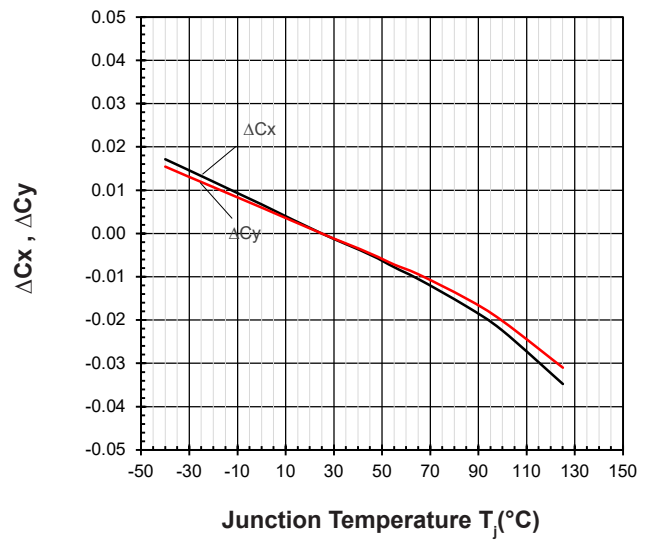


Mini DomiLED • InGaN : DNW-EKG-I5 Package Outlines

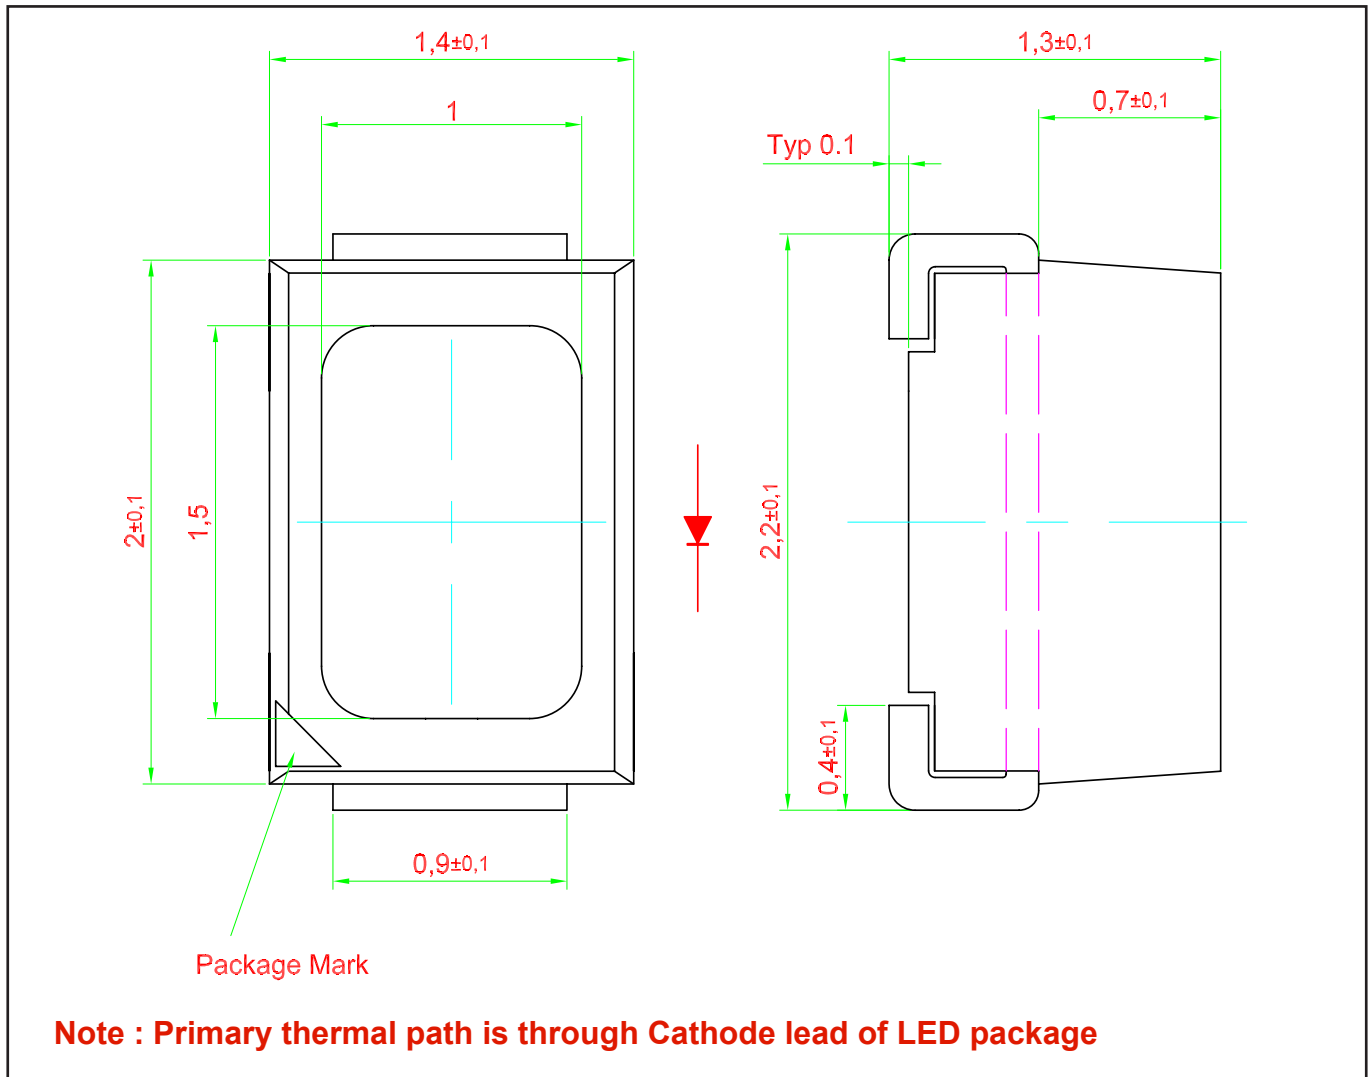


Material

| Material | |
|-----------------|------------------------------------|
| Lead-frame | Cu Alloy With Au Plating |
| Package | High Temperature Resistant Plastic |
| Encapsulant | Silicone Resin |
| Soldering Leads | Sn Plating |



Recommended Solder Pad

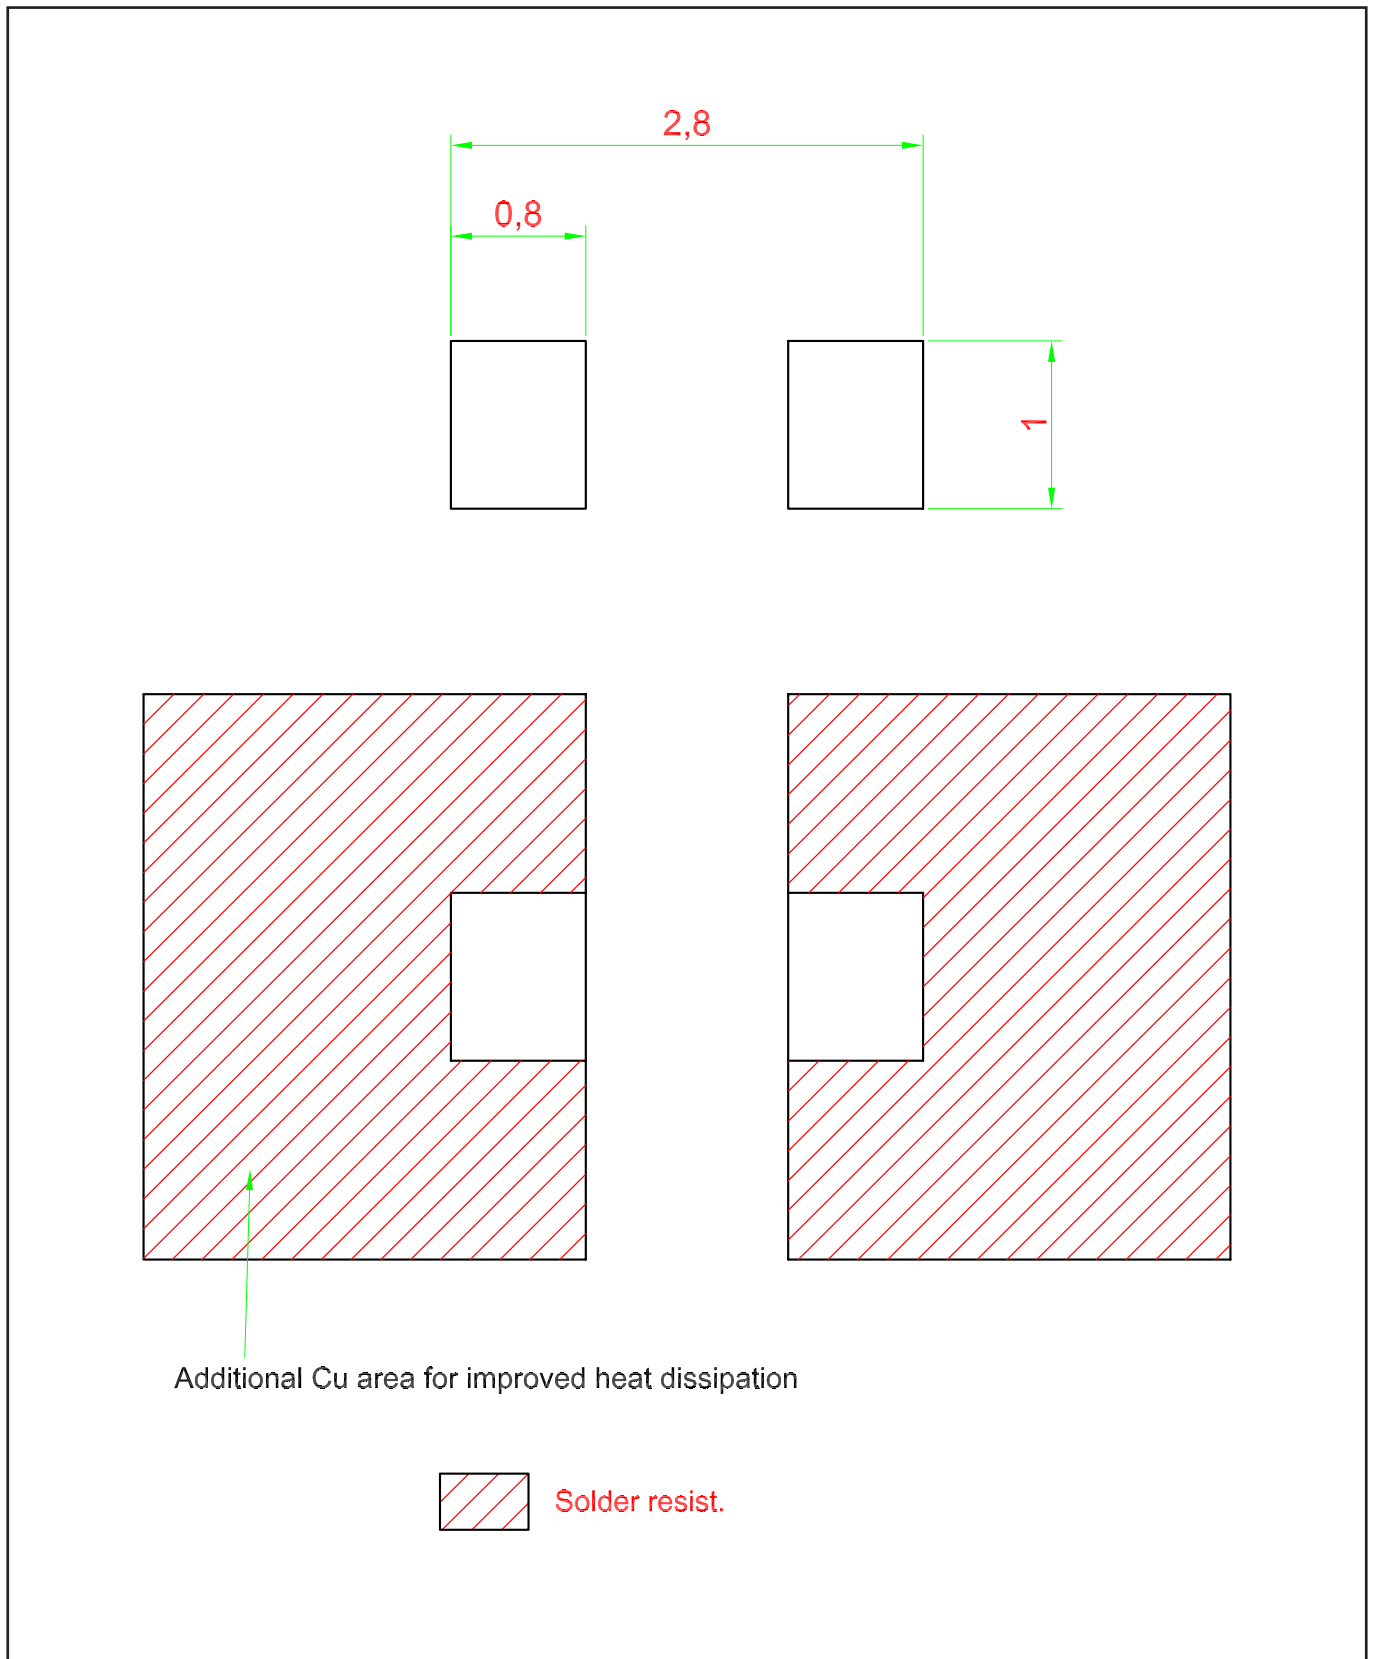

Taping and orientation

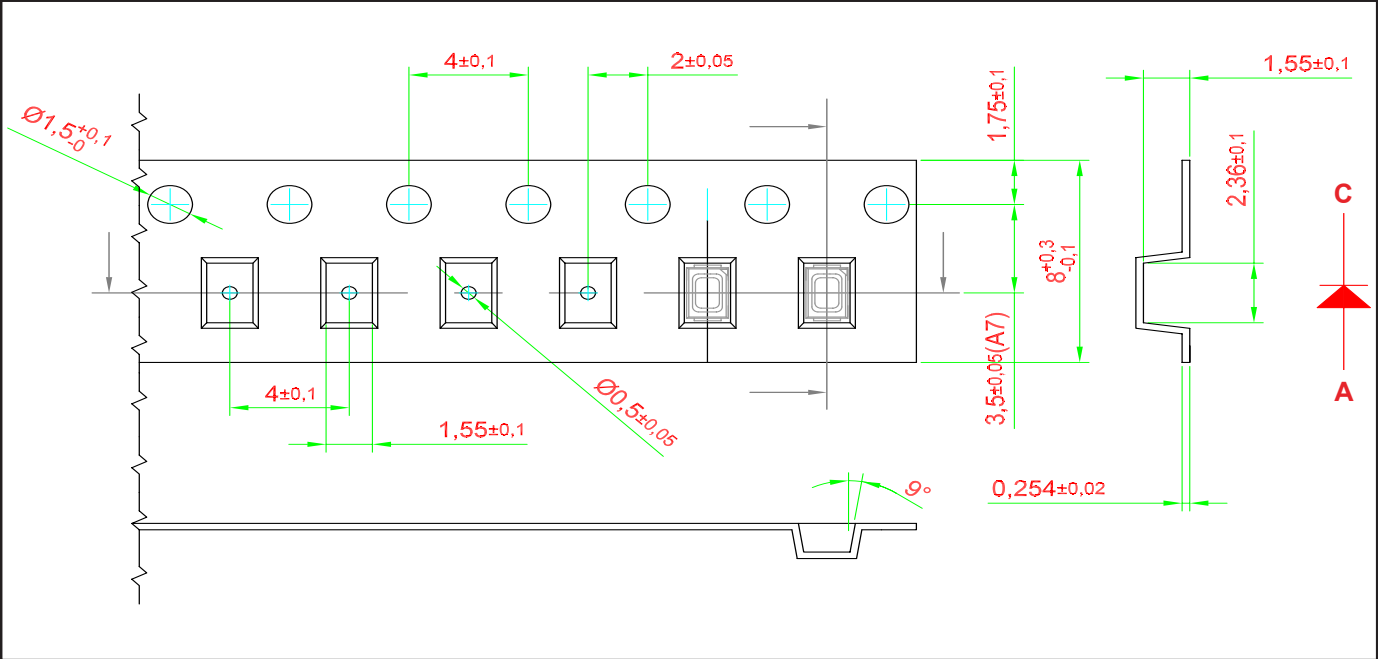

Packaging Specification

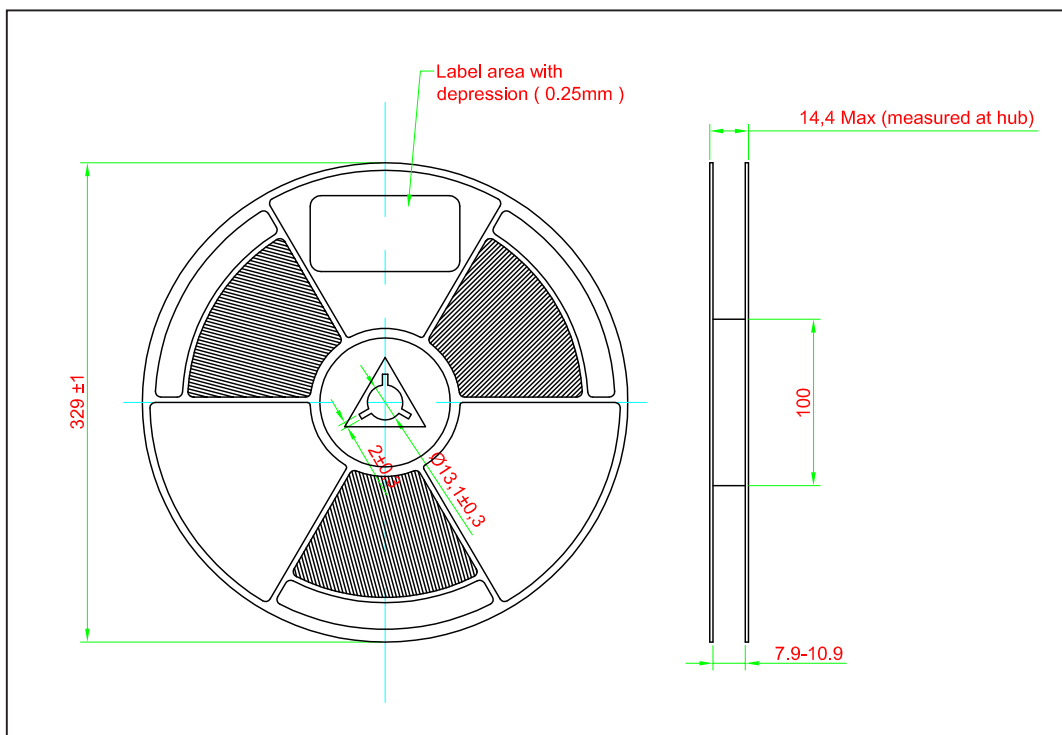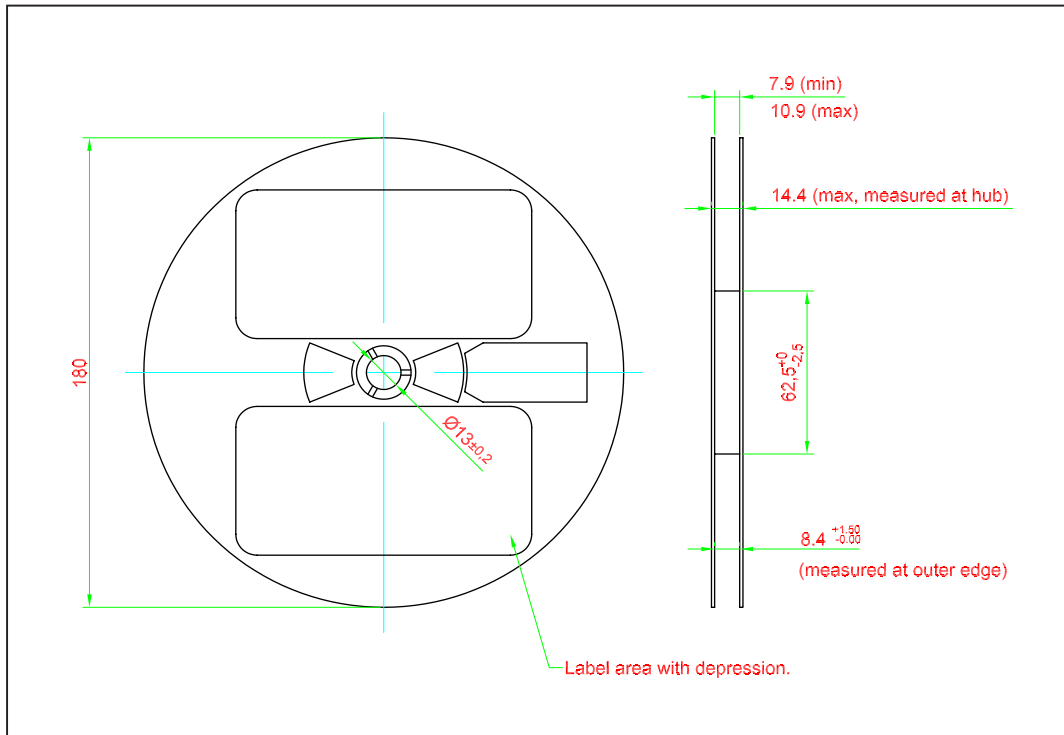


| | Reel Diameter (mm) | Quantity (pcs) | *Ordering Number |
|------------------|--------------------|----------------|-------------------|
| Standard Packing | 180 | 3000 | DNW-EKG-xxx-x-x |
| Optional Packing | 329 | 10000 | DNW-EKG-xxx-x-x-J |


Notes:

* For ordering purpose only. Please consult sales and marketing for details.

Packaging Specification

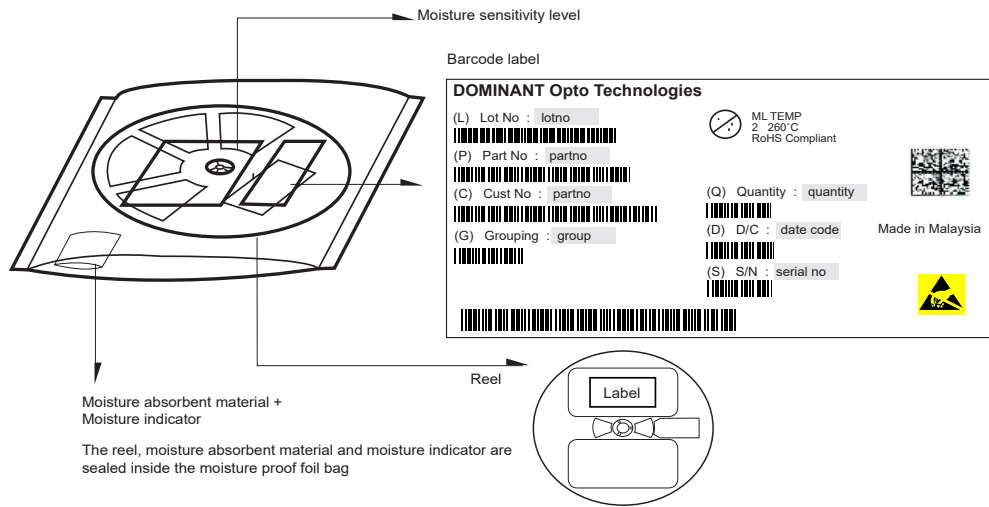


| Quantity per bag (pcs) | Average 1pc Mini DomiLED (gram) | 1 completed bag (gram) |
|------------------------|---------------------------------|------------------------|
| 3000 | 0.007 | 200 ± 10 |
| 10000 | 0.007 | 550 ± 10 |

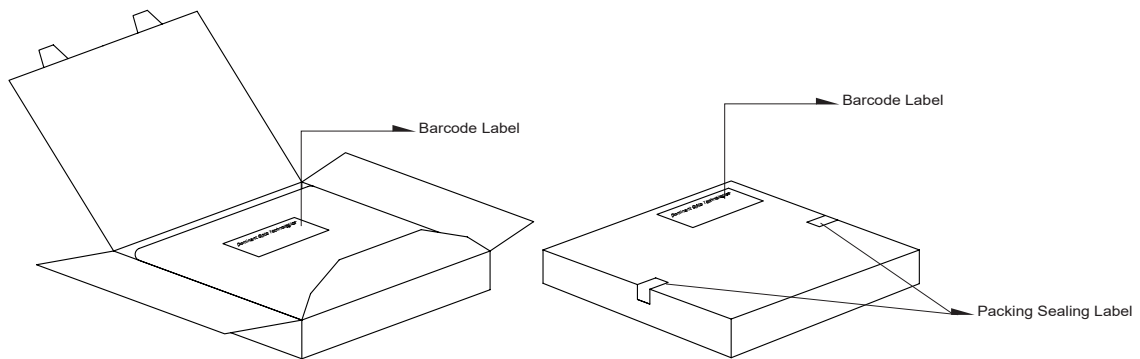

| Reel Diameter (mm) | Packing Box Dimensions (mm) |
|--------------------|-----------------------------|
| 180 | 210 x 210 x 16 |
| 329 | 345 x 345 x 16 |

Recommended Pb-free Soldering Profile

Product complies to MSL Level 2 acc. to JEDEC J-STD-020E

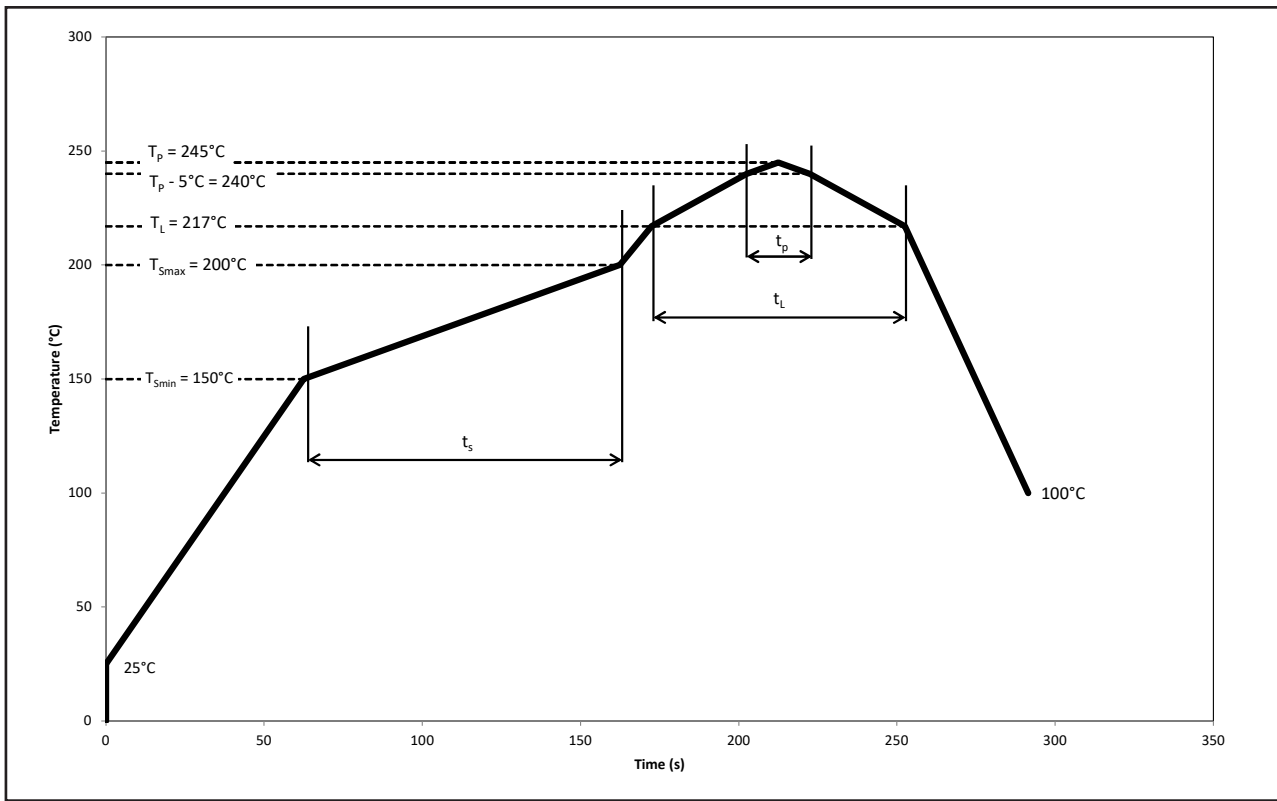

| Profile Feature | Symbol | Pb-Free Assembly | | | Unit |
|--|--------|------------------|-------------|------|------|
| | | Min. | Recommended | Max. | |
| Ramp-up rate to preheat 25°C to T_{smin} | - | - | 2 | 3 | °C/s |
| Time t_s T_{smin} to T_{smax} | t_s | 60 | 100 | 120 | s |
| Ramp-up rate to peak T_L to T_p | - | - | 2 | 3 | °C/s |
| Liquidous temperature | T_L | - | 217 | - | °C |
| Time above liquidous temperature | t_L | 60 | 80 | 150 | s |
| Peak temperature | T_p | - | 245 | 260 | °C |
| Time within 5°C of the specified peak temperature $T_p - 5^\circ\text{C}$ | t_p | 10 | 20 | 30 | s |
| Ramp-down rate T_p to 100°C | - | - | 3 | 6 | °C/s |
| Time 25°C to T_p | - | - | - | 480 | s |

Appendix

1) **Brightness:**

- 1.1 Luminous intensity is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 8\%$ and an expanded uncertainty of $\pm 11\%$ (according to GUM with a coverage factor of $k=3$).
- 1.2 Luminous flux is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 8\%$ and an expanded uncertainty of $\pm 11\%$ (according to GUM with a coverage factor of $k=3$).
- 1.3 Radiant intensity is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 8\%$ and an expanded uncertainty of $\pm 11\%$ (according to GUM with a coverage factor of $k=3$).
- 1.4 Radiant flux is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 8\%$ and an expanded uncertainty of $\pm 11\%$ (according to GUM with a coverage factor of $k=3$).

2) **Color:**

- 2.1 Chromaticity coordinate groups are measured at current pulse 25 ms(typ) with an internal reproducibility of ± 0.005 and an expanded uncertainty of ± 0.01 (accordingly to GUM with a coverage factor of $k=3$).
- 2.2 Dominant wavelength is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 0.5\text{nm}$ and an expanded uncertainty of $\pm 1\text{nm}$ (accordingly to GUM with a coverage factor of $k=3$).

3) **Voltage:**

- 3.1 Forward Voltage, V_f is measured when a current pulse of 8 ms(typ) with an internal reproducibility of $\pm 0.05\text{V}$ and an expanded uncertainty of $\pm 0.1\text{V}$ (accordingly to GUM with a coverage factor of $k=3$).

4) **Typical Values:**

- 4.1 At special conditions of LED manufacturing processes, typical data or calculated correlations of technical parameters only reflect the statistical figures. But not necessarily correspond to the actual parameters of each single product, which could differ from the typical data or calculated correlations or the typical characteristic line. These typical data may change whenever technical improvements happen.

5) **Tolerance of Measure**

- 5.1 Unless otherwise noted in drawing, tolerances are specified with ± 0.1 and dimension are specific in mm.

6) **Reverse Voltage:**

- 6.1 Not designed for reverse operation. Continuous reverse voltage can cause migration and LED damage.

Revision History

| Page | Subjects | Date of Modification |
|----------------|---|----------------------|
| - | Initial Release | 04 Dec 2018 |
| 10, 11, 12, 13 | Add Polarity in Taping and Orientation Update Package Specification Update Recommended Pb-free Soldering Profile | 02 Sep 2021 |
| 1, 2, 6, 7, 13 | Update Features: AEC-Q101 to AEC-Q102 Update Peak Pulse Current Test Condition Update Operating and Storage Temperature Update Graph Update Recommended Pb-free Soldering Profile | 08 Mar 2023 |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

NOTE

All the information contained in this document is considered to be reliable at the time of publishing. However, DOMINANT Opto Technologies does not assume any liability arising out of the application or use of any product described herein.

DOMINANT Opto Technologies reserves the right to make changes to any products in order to improve reliability, function or design.

DOMINANT Opto Technologies products are not authorized for use as critical components in life support devices or systems without the express written approval from the Managing Director of DOMINANT Opto Technologies.

Dispose of product is in accordance with local, regional, national and international regulations.

About Us

DOMINANT Opto Technologies is a dynamic company that is amongst the world's leading automotive LED manufacturers. With an extensive industry experience and relentless pursuit of innovation, DOMINANT's state-of-art manufacturing and development capabilities have become a trusted and reliable brand across the globe. More information about DOMINANT Opto Technologies, an IATF 16949 and ISO 14001 certified company, can be found under <http://www.dominant-semi.com>.

Please contact us for more information:

DOMINANT Opto Technologies Sdn. Bhd
Lot 6, Batu Berendam, FTZ Phase III, 75350 Melaka, Malaysia.
Tel: +606 283 3566 Fax: +606 283 0566
E-mail: sales@dominant-semi.com